



# CONSOLE EXTENDER

## USER MANUAL

---

### CE-110

### CE-120

---

Read this guide thoroughly and follow the installation and operation procedures carefully in order to prevent any damage to the units and/or any devices that connect to them.

---

This package contains:

- 1 CE-110 or 120 Console Extender
- 1 Power Adapter
- 1 User Manual

If anything is damaged or missing, contact your dealer.

---

© Copyright 1996 - 2004 ATEN® International Co., Ltd.  
Manual Part No. PAPE - 1086-100  
Printed in Taiwan 11/2004

2004-11-01

**Warning!!!** This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to Part 15 of the FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to take whatever measures may be necessary to correct the interference at his own expense.

2004-11-01

## OVERVIEW

Console extenders allow users to increase the distance between the computer's system box and the user's console (keyboard, monitor, and mouse). It is perfect for any type of installation where the console needs to be in a conveniently accessible location, but you want the system equipment to reside in a safe place - away from dust, dirt, and harsh environmental influences.

The CE-110 and CE-120 are fundamentally similar - except that the CE-110 is for use with PC/AT type computers, whereas the CE-120 is for use with PS/2 type computers.

## FEATURES

- ♦ Supports SVGA, VGA, and Multisync monitors
- ♦ Automatic power saving mode turns off the console when the computer is off
- ♦ Transmission distance of up to 80m (262ft)
- ♦ CE-110 for PC/AT computers
- ♦ CE-120 for PS/2 computers

## CABLES

Although it is possible to use standard KVM cables to link computers to the console extender, for optimum signal integrity and to simplify the layout, we strongly recommend that you use high quality CS Custom 3-in-1 KVM Cables. To purchase cables, contact your dealer.


### CE-110 Cables:

- |                       |            |          |
|-----------------------|------------|----------|
| 1. To computer ports: | 1.8m (6ft) | SL-1001A |
| 2. To console:        | 10m (33ft) | SL-1010A |
|                       | 20m (66ft) | SL-1020A |



### CE-120 Cables:

- |                       |            |          |
|-----------------------|------------|----------|
| 1. To computer ports: | 1.8m (6ft) | SL-1001P |
| 2. To console:        | 10m (33ft) | SL-1010P |
|                       | 20m (66ft) | SL-1020P |


## CONNECTION DIAGRAM

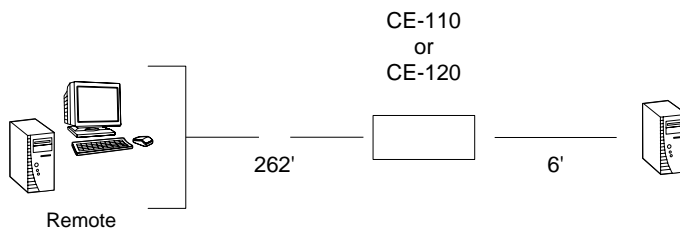

## CE110 (FOR PC/AT) FRONT AND REAR PANELS

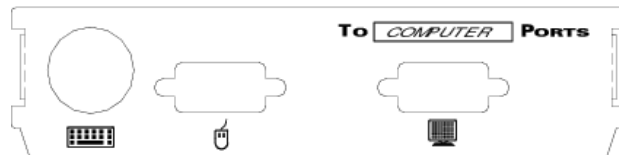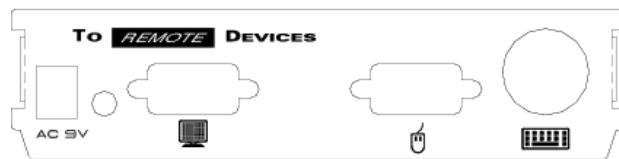

## CE120 (FOR PS/2) FRONT AND REAR PANELS

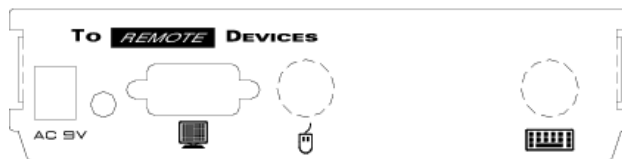

## INSTALLATION

The CE-110 and CE-120 have identical installation procedures. Therefore, the steps described below apply to both of them. Setting up the Console Extender is simply a matter of plugging in the cables:

1. Make sure that all the equipment to be connected up is powered Off.
2. Plug the cables from the console devices (mouse, keyboard, monitor), into their ports on the *Remote Devices* side of the Console Extender. Each port and connector is marked with an appropriate icon to indicate which it is.
3. Plug the appropriate connectors on one end of the KVM cable (see *Cables* on p. 2 for details) into the *Computer Ports* side of the Console Extender. Each port and connector is marked with an appropriate icon to indicate which it is.

**Note:** The female monitor connector is the one that plugs into the Console Extender.

4. Plug the connectors on the other end of the cable into the appropriate ports on the computer system. Each connector is marked with an appropriate icon to indicate which it is.
5. Plug the power adapter (supplied with this package) into an AC source; plug the adapter's power cable into the Console Extender's AC 9V Power Jack.
6. Turn on the power to your equipment.

This completes the installation.

## SPECIFICATIONS

Function		CE-110	CE-120
Computer Type		PC/AT	PS/2
Connectors	Keyboard	1 x 5 pin DIN	1 x 6 pin mini-DIN
	Mouse	1 x 9 pin D	1 x 6 pin mini-DIN
	Monitor	1 x HD-15	
LEDs		1 x Power Indicator	
Power Consumption		AC 9V 300mA (max.)	
Cable Length		80m to console; 2m to computer (max.)	
Housing		Metal	
Weight		270g	
Dimensions (L x W x H)		137 x 103 x 34mm	

#### **LIMITED WARRANTY**

IN NO EVENT SHALL THE DIRECT VENDOR'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, DISK, OR ITS DOCUMENTATION.

The direct vendor makes no warranty or representation, expressed, implied, or statutory with respect to the contents or use of this documentation, and especially disclaims its quality, performance, merchantability, or fitness for any particular purpose.

The direct vendor also reserves the right to revise or update the device or documentation without obligation to notify any individual or entity of such revisions, or update. For further inquiries, please contact your direct vendor.